



Wall mounted unit

FTXTA-BW + RXTA-B

BLUEEVOLUTION stylish



Guaranteed operation down to -25°C



Fireplace logic



Coanda effect - heating



Heat boost

DAIKIN




Onecta app

Where innovation meets creativity, even at ambient temperatures down to -25°C

- › Guaranteed heating capacity down to -25°C
- › Even temperature distribution thanks to fireplace logic
- › Compact design in matt crystal white
- › Perfect temperature distribution thanks to Coanda effect
- › Intelligent thermal sensor: air flow is adjusted when detecting temperature differences
- › Onecta app
- › Voice control

- › Bluevolution range: lower environmental impact
- › Seasonal efficiency values up to A+++ in cooling and heating
- › Daikin Flash Streamer technology: powerful air purification
- › Practically inaudible
- › Heat boost: fast heating during start-up (pair only)

FTXTA-BW + RXTA-B

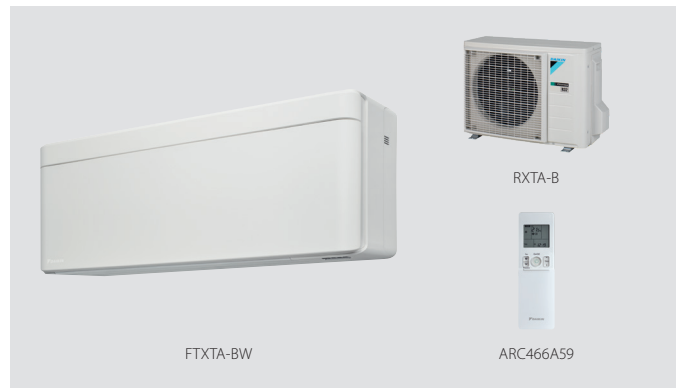


Efficiency data		FTXTA + RXTA		30BW + 30B	
Cooling capacity	Min./Nom./Max.	kW		0.70 /3.00 /4.50	
Heating capacity	Min./Nom./Max.	kW		0.80 /3.20 /6.90	
Power input	Cooling	Nom. kW		0.71	
	Heating	Nom. kW		0.66	
Space cooling	Energy efficiency class			A++	
	Capacity	Pdesign kW		3.00	
	SEER			7.63	
	Annual energy consumption			kWh/a	
Space heating (Average climate)	Energy efficiency class			A+++	
	Capacity	Pdesign kW		2.60	
	SCOP/A			5.10	
	Annual energy consumption			kWh/a	
Current - 50Hz	Maximum fuse amps (MFA)			A	
				16	

Indoor unit		FTXTA		30BW	
Dimensions	Unit	HeightxWidthxDPTH		mm	
				295 x798 x189	
Weight	Unit			kg	
				11.5	
Air filter	Type			Removable / washable	
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/ High	m³/min	
		Heating	Silent operation/ Low/Medium/ High	m³/min	
				4.6 /5.7 /8.3 /11.9	
				5.1 /6.0 /8.0 /11.5	
Sound power level	Cooling			dBA	
	Heating			dBA	
				60	
				60	
Sound pressure level	Cooling	Silent operation/Low/High		dBA	
	Heating	Silent operation/Low/High		dBA	
				20 /25 /43	
				19 /24 /41	
Control systems	Infrared remote control			ARC466A59	
	Wired remote control			BRC073A4	
Piping connections	Drain			18	

Outdoor unit		RXTA		30B	
Dimensions	Unit	HeightxWidthxDPTH		mm	
				551 x763 x312	
Weight	Unit			kg	
				38	
Sound power level	Cooling			dBA	
				-	
Sound pressure level	Cooling	Low/Nom./High		dBA	
	Heating	Low/Nom./High		dBA	
				-48 /-	
				-49 /-	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	
	Heating	Ambient	Min.~Max.	°CWB	
				-10 ~46	
				-25 ~18	
Refrigerant	Type			R-32	
	GWP			675	
	Charge			kg/TCO2Eq	
				1.1 /0.74	
Piping connections	Liquid - Gas	Type		Flare connection - Flare connection	
	Piping length	OU - IU	Max.	m	
				20	
	Piping length			-	
	Level difference	IU - OU	Max.	m	
				15	
Power supply	Phase/Frequency/Voltage			Hz/V	
				1~/50 /220-240	

Daikin Europe Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · <https://www.daikin.eu> · RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN22-062 08/2022



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.